

# KP16C-velcro




## Data Sheet

<b>Backing:</b>	Flexible Latex C-Paper
<b>Bonding Agent:</b>	Resin
<b>Grain:</b>	Aluminium oxide with stearat
<b>Coating:</b>	Open
<b>Sectors of Application:</b>	Wood, paints, filler and plastic
<b>Utilisation:</b>	Manual sanding eccentric sanding machines
<b>Advantages:</b>	Stearate coating against clogging and loading on demanding surfaces. Universally usable due to multi-holes (8+6+1).



### Application:

Wood	Metal	Leather	Lacquer	Floor	Glass

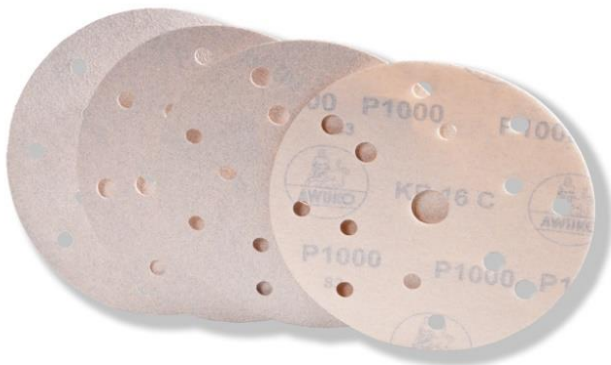

### Available Grain Numbers:

16	20	24
30	36	40
50	60	80
100	120	150
180	220	240
280	320	360
400	500	600
800	900	1000
1200	1500	2000

**Utilisation:** Machine grinding Manual grinding

**Forms:** Discs Sheets

**AWUKO ABRASIVES**  
**Wandmacher GmbH & Co. KG**  
 Hedemündener Straße 9  
 D-34346 Hann. Münden

E-Mail: [info@awuko.com](mailto:info@awuko.com)  
 Website: <http://www.awuko.com/>

Phone: +49 (0)5541 7097-0  
 Fax national: 05541 6727  
 Fax international: +49 (0)5541 6729